


1		2		3		4		5		6		7		8	
REVISIONS															
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE													

FREQUENCY RANGE		DC-12.0GHz	
IMPEDANCE (CODE)		75ohm	
VSWR	DC-<3GHz	<1.10	
	3-<6GHz	<1.15	
	6-12GHz	<1.20	

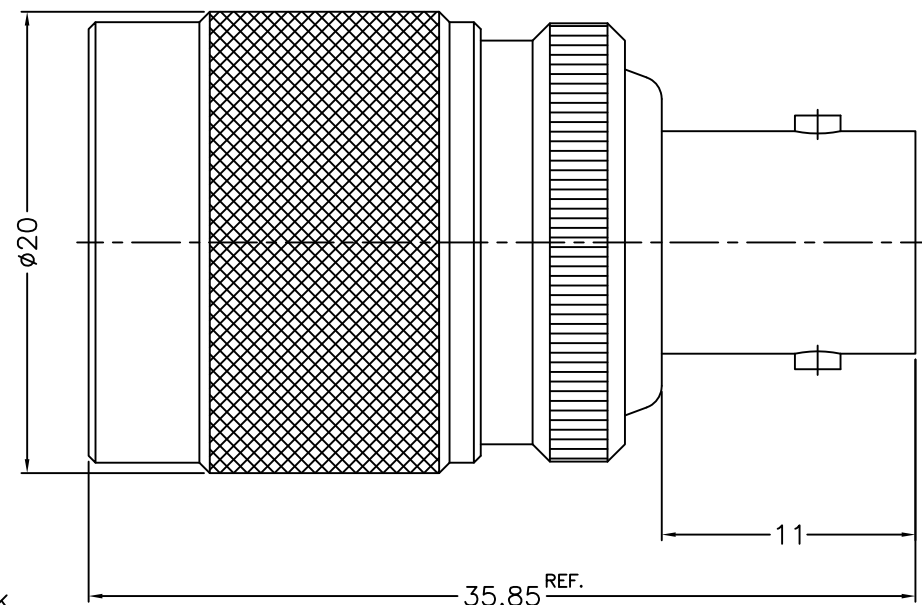

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS
 2. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK
 3. BERYLLIUM COPPER
 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
 5. ULTEM 1000
 6. PASSIVATED

RoHS COMPLIANT

8	SHELL	NOTE 1	NOTE 2	1	5824-1000-1	DIMENSIONS ARE IN MILLIMETERS		PART NO.		G.L.I.					
7	GASKET	SILICONE	RED	1	GS-80-156-15	UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVED	DATE						
6	RETAINER RING	SUS 304	NOTE 6	1	5824-1000-7	0.5-6 = ±0.2		07-10-'18		N PLUG TO BNC JACK ADAPTOR					
5	INSULATOR	NOTE 5	NATURAL	1	100-NM2-BM-3-75U	6-30 = ±0.4		CHECKED	DATE	DRAWING NO.					
4	CONTACT PIN	NOTE 3	NOTE 4	1	100-NM3-BF-4	30-120 = ±0.6		07-10-'18		100-NM3-BF-75					
3	CONTACT PIN	NOTE 1	NOTE 4	1	100-NM3-BF-3	120-315 = ±1		DRAWN	DATE	FILE NO. R:\D\G\DWG\100\NM3-BF\75					
2	BODY	NOTE 1	NOTE 2	1	100-NM3-BF-2	315-1000 = ±1.6		07-10-'18							
1	BODY	NOTE 1	NOTE 2	1	100-NM3-BF-1	1000-2000 = ±2.4									
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	3/1	ISSUE	A						

1		2		3		4		5		6		7		8	
---	--	---	--	---	--	---	--	---	--	---	--	---	--	---	--