| REVISIONS | | |
|---|---|---|
| ISS | ZONE | DESCRIPTION\PER REQUEST\DATE |
| | | |

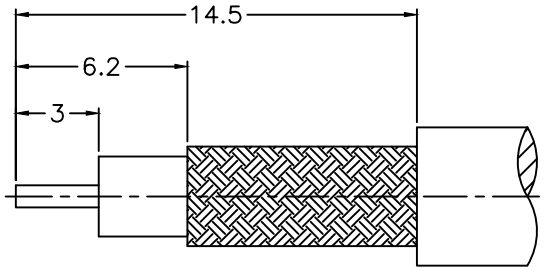


RECOMMENDED
CABLE STRIPPING DIM'S
（建議剝線尺寸）

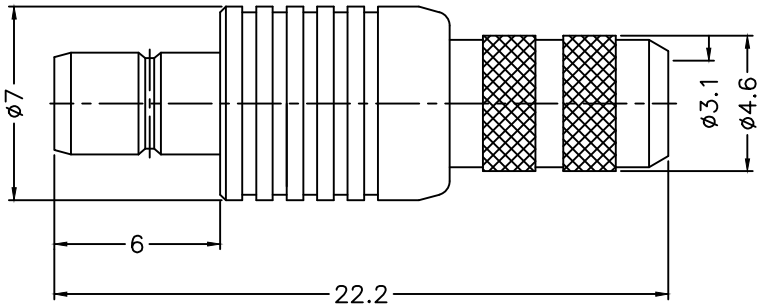


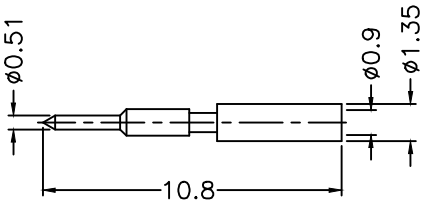


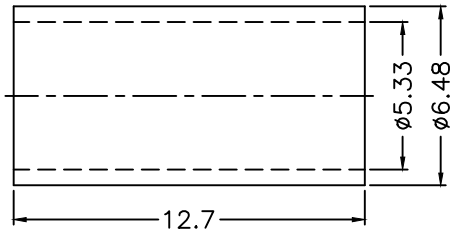


NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. THIN GOLD OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
4. TEFLON

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE .043

RoHS COMPLIANT

| NO. | DESCRIPTION | MATERIAL | FINISH | Q'TY | DRAWING NO. |
|---|---|---|---|---|---|
| 5 | FERRULE | COPPER | NOTE 2 | 1 | FR-533-648-127C |
| 4 | CONTACT PIN | NOTE 1 | NOTE 3 | 1 | 500-1421A1-4-0.9 |
| 3 | BARREL | NOTE 1 | NOTE 2 | 1 | 500-6121A2-3-06 |
| 2 | INSULATOR | NOTE 4 | NATURAL | 1 | 500-1421A1-2-50T |
| 1 | BODY | NOTE 1 | NOTE 2 | 1 | 500-1121A3-1 |

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

SCALE 4/1 ISSUE A

PART NO.

APPROVED DATE 04-19-'16

CHECKED DATE 04-19-'16

DRAWN DATE 04-19-'16

# G.L.I.

TITLE SMB CRIMP JACK
(FOR RG-58, 58A, 58C, 141)

DRAWING NO. 500-1121A3-06-50

FILE NO. R:\D\G\DWG\500\1121A3\06\50